


**RoHS**  
Compliant



- Power Rating: 1200W
- Input Voltage: 120-277Vac
- Constant Power CC/CV Design
- Output Current (2200mA-28000mA)
- Efficiency to 95%
- 0-10V/PWM/Timer Dimming
- Communication Smart Control Digital Port
- Dim-to-off
- LVP, SCP, OVP, and OTP
- IP67
- High Surge Voltage Bearing Capacity: 380Vac, 10s
- 5-year warranty

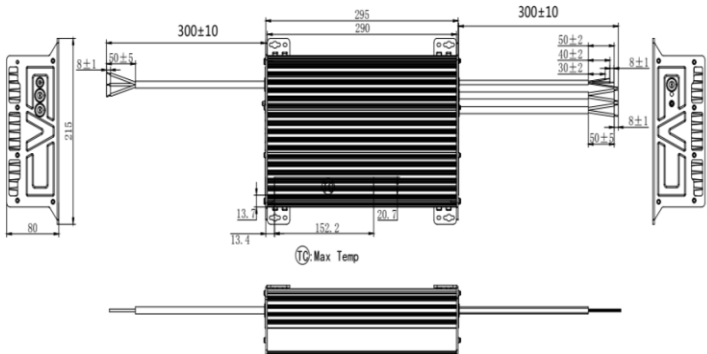

### Application Options:

- High Power Rating
- IP67
- Dimming & Programming Options

**Contact your Autec Technical Sales Rep today and discover if our LED Driver “The Max” is the perfect solution to your unique lighting application!**

Model Number	Output Power	Output Voltage	Voltage Range(4)	Typ. Current	Current Range	Programmable Current Range(11)	Output Adj Range(12)	Efficiency
L13WCP1200S2200-54ST	1200W	54V	27-54V	22A	22A	11-22A	2.2-22A	94.5%
L13WCP1200S6600-180ST	1200W	180V	TBD	6.6A	TBD	TBD	TBD	TBD
L13WCD1200S2800-24ST	670W	24V	12-30V	28A	TBD	14-28A	N/A	93%
L13WCD1200S2800-30ST	850W	30V	15-38V	28A	TBD	14-28A	N/A	93.5%

\*Partial models shown, see data Sheets or contact Autec Sales for full list of models.

### Applications:

- Indoor & outdoor use
- Greenhouse & horticultural
- Industrial grade

### Packing:

- Unit Weight: 6.5kg
- 2pcs/Carton
- Carton Weight: 14kg
- # Cartons/pallet: TBA

