

**RoHS**   
**Compliant**




- Power Rating: 600W
- Input Voltage: 120-277Vac
- Constant Power CC/CV Design
- Output Current (1100mA-25000mA)
- Efficiency to 95%
- 0-10V/PWM/Timer Dimming
- Communication Smart Control Digital Port
- Dim-to-off
- LVP, SCP, OVP, and OTP
- IP67
- High Surge Voltage Bearing Capacity: 380Vac, 10s
- 5-year warranty

### Application Options:

- High Power Rating
- IP67
- Dimming & Programming Options

Contact your Autec Technical Sales Rep today and discover if our LED Driver “The Max” is the perfect solution to your unique lighting application!

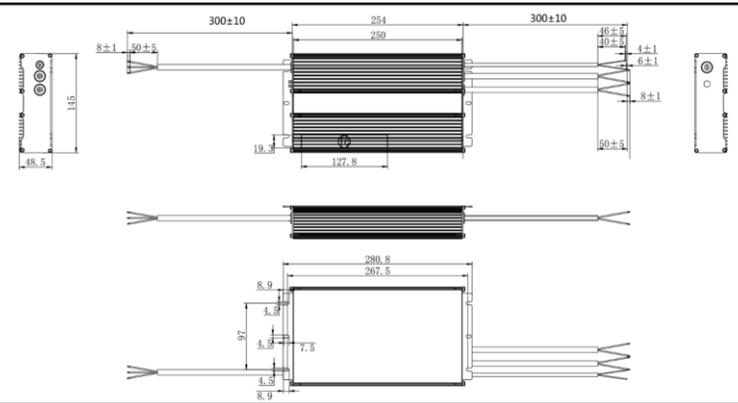

Model Number	Output Power	Output Voltage	Voltage Range(4)	Typ. Current	Current Range	Programmable Voltage Range(11)	Output Adj Range(12)	Efficiency
L13WCP600S2500-24ST	600W	24V	12-30V	25A	20-25A	24-30V	2-25A	94%
L13WCP600S2000-30ST	600W	30V	15-38V	20A	16-20A	30-38V	1.6-20A	94%
L13WCD600S2500-24ST	600W	24V	12-30V	25A	20-25A	24-30V	N/A	94%
L13WCD600S2000-30ST	600W	30V	15-38V	20A	16-20A	30-38V	N/A	94%


\*Partial models shown, see data Sheets or contact Autec Sales for full list of models.

### Applications:

- Indoor & outdoor use
- Greenhouse & horticultural
- Industrial grade

### Packing:

- Unit Weight: 3.6kg
- 4pcs/Carton
- Carton Weight: 16kg
- # Cartons/pallet: TBA

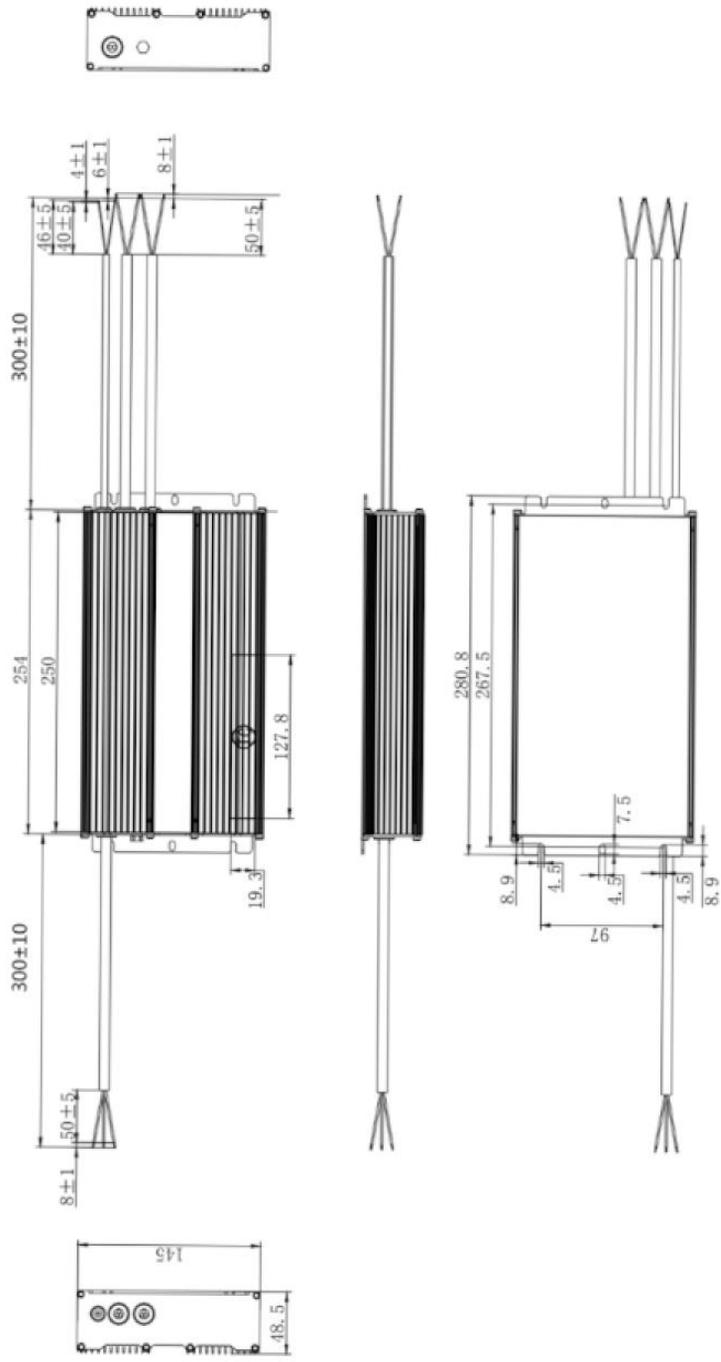

		DIMENSIONS ARE IN INCHES TOLERANCES: FRACTIONAL ± ANGULAR: MACH ± BEND ± TWO PLACE DECIMAL ± THREE PLACE DECIMAL ±	NAME	DATE
		MATERIAL	DRAWN	
		FINISH	CHECKED	
			ENG APPR.	
			MFG APPR.	
			Q.A.	
NEXT ASSY	USED ON		COMMENTS:	
APPLICATION	DO NOT SCALE DRAWING			



TITLE: <b>L13WCX600</b>		
SIZE	DWG. NO.	REV.
<b>A</b>		
SCALE:	WGHT.	SHEET OF