

Datasheet

M.2 (P80) 3TE2 series

- PCIe Gen. III x2, NVMe 1.3
- Excellent data transfer speed
- Zero mechanical interference
- Anti-vibration mechanical design
- LDPC ECC engine supported.
- End-to-end Data Path Protection
- iCell supported



Introduction

Innodisk M.2 (P80) 3TE2 is an NVM Express DRAM-less SSD designed as the standard M.2 form factor with PCIe interface. M.2 (P80)3TE2 supports PCIe Gen III x2, and it is compliant with NVMe 1.3 providing excellent performance. Moreover, it adopts industrial 3D TLC NAND Flash providing high endurance and reliability. With sophisticated error detection and correction (ECC) functions, the module can ensure full End-to-end Data Path Protection that secures the data transmission between host system and NAND Flash.

Innodisk M.2 (P80) 3TE2 is integrated with Marvell controller which provide both low power consumption and efficient heat dissipation, making the SSD optimal for space-constrained IPCs and server boot-up applications.

M.2 (P80) 3TE2 series Diagram

Contact us for more information about the M2 (P80) 3TE2.

Innodisk is a service-driven provider of industrial embedded flash and DRAM storage products and technologies, with a focus on the cloud computing, industrial/embedded, and aerospace and defense industries.

Headquarters (Taiwan)


5F., No. 237, Sec. 1, Datong Rd., Xizhi Dist., New Taipei City 221, Taiwan
Tel: +886-2-7703-3000
Email: sales@innodisk.com

Branch Offices:

USA
usasales@innodisk.com
+1-510-770-9421
Europe
eusales@innodisk.com
+31-40-3045-400
Japan
jpsales@innodisk.com
+81-3-6667-0161
China
sales_cn@innodisk.com
+86-755-21673689
www.innodisk.com

© 2018 Innodisk Corporation.
All right reserved. Specifications are subject to change without prior notice.

20181227

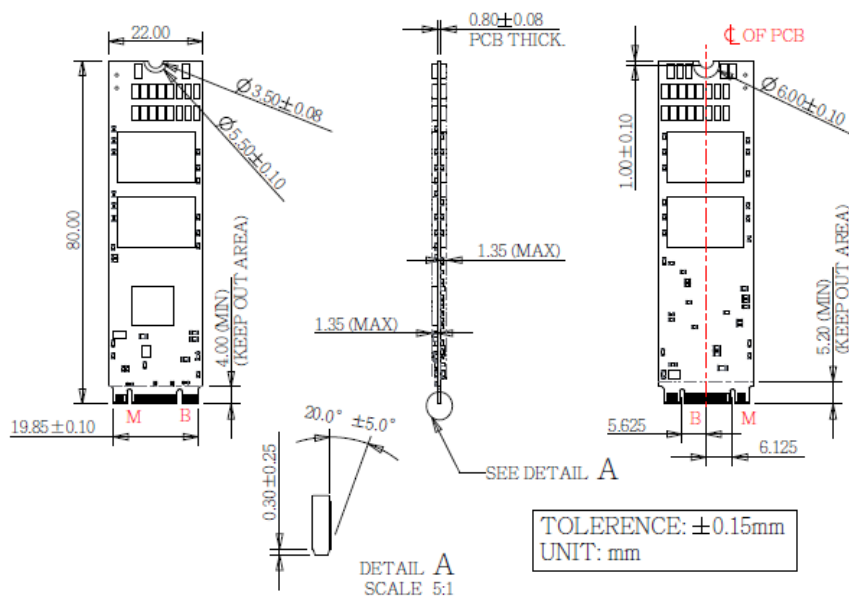

Interface	PCIe Gen. III x2
Flash Type	3D TLC
P/E cycle	3,000
Capacity	64GB~1TB
Max. Channels	4
Sequential R/W (MB/sec, max.)	1300/680
Max. Power Consumption	3W(3.3Vx910mA)
Thermal Sensor	√
External DRAM buffer	-
H/W Write Protect	Optional
iCell	Optional
Dimension (WxLxH)	22.0 X 80.0 X 3.5 mm
Environment	Vibration: 20G @7~2000Hz Shock: 1500G @ 0.5ms Storage Temperature: -55°C ~ +95°C MTBF: 3,000,000

Ordering Information

Operation Temp.	64GB	128GB	256GB	512GB	1TB
Standard Grade (0°C ~ +70°C)	DEM28-64GM61ECADF(P)	DEM28-A28M61ECAQF(P)	DEM28-B56M61ECAQF(P)	DEM28-C12M61ECAQF(P)	DEM28-01TM61ECAQF(P)
Industrial Grade (-40°C ~ +85°C)	DEM28-64GM61EWADF(P)	DEM28-A28M61EWAQF(P)	DEM28-B56M61EWAQF(P)	DEM28-C12M61EWAQF(P)	DEM28-01TM61EWAQF(P)

*(P) for model with iCell function

innodisk

www.innodisk.com