



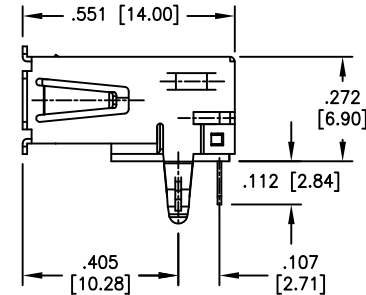



APPROVED: _____
DATE: _____ TITLE: _____

Rev	AWO #	Description	Date	Appr
-		RELEASED	12/3/04	
A		RE-DESIGNED SHELL AND INSULATOR	1/06/06	
B		UPDATE DRAWING	12/22/15	AY/SL
C		UPDATE CURRENT RATING	3/22/16	AY/YC

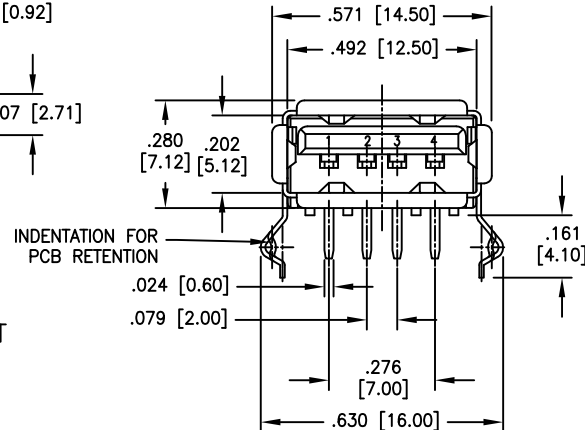

SPECIFICATIONS:
Material:
Insulator: Hi-Temp Thermoplastic, rated UL 94V-0
Insulator color: Black
Contacts: Copper Alloy
Shell: Copper Alloy, Nickel plated
Plating:
Gold flash over Nickel underplate on contact area,
Tin over Copper underplate on PCB tails
Electrical:
Voltage rating: 30 VAC
Current rating: 1.5 Amp @ 250V AC
Contact resistance: 30 mohms max.
Insulation resistance: 1000 Mohms min. @ 500 VDC
Dielectric withstanding voltage: 500 VAC
Temperature Rating:
Operating temperature: -20°C to +60°C
Environmental:
Lead free, RoHS compliant.

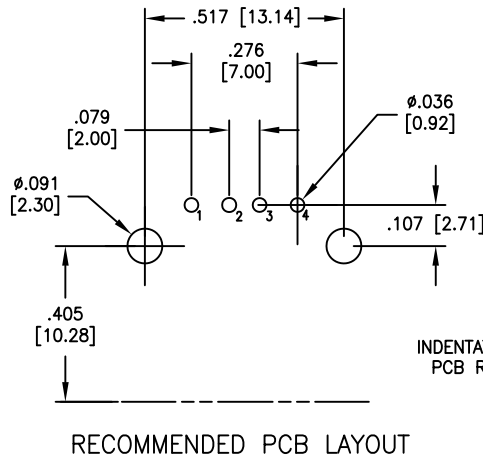

UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE INCHES [MM] TOLERANCES: EXCEPT AS NOTED INCHES HOLES .X ± .10 Ø.X ± .10 .XX ± .020 Ø.XX ± .015 .XXX ± .015 Ø.XXX ± .010				ADAM TECH 909 Rahway Avenue, Union, NJ 07083 Phone: 908-687-5000 Fax: 908-687-5710			
APPROVALS DRAWN SS 10/4/04 CHECKED APPROVED				TITLE			
				UNIVERSAL SERIAL BUS			
				SINGLE PORT, RIGHT ANGLE, PCB			
				SIZE	PART NO.		REV.
				X	USB-A-S-RA-HT		C
				REF:	S00005C		SHEET 1 OF 1
				SCALE: NTS			

PART NO.	REV.
USB-A-S-RA-HT	C