


Switching element

71-672.026

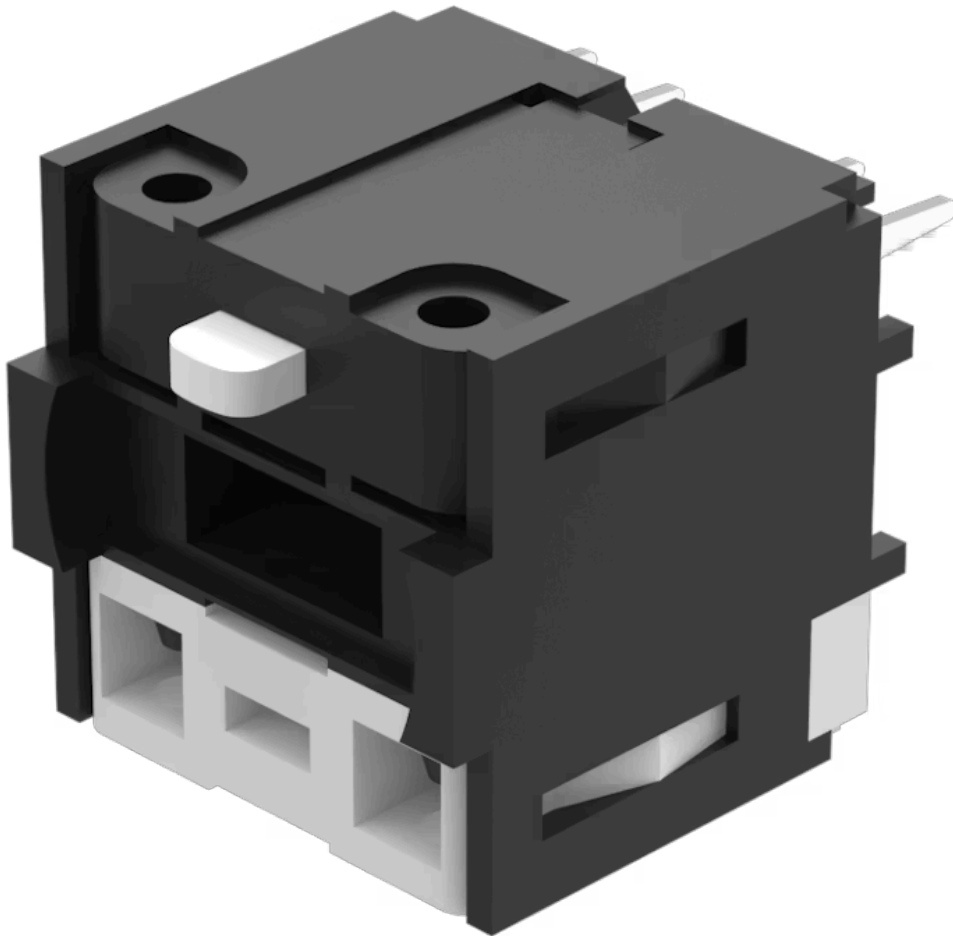

<https://www.eao.com/component/71-672.026/en/s...>

Your product:



71-672.026

Switching element

ELECTRICAL CHARACTERISTICS

Contacts: 2 NC / 2 NO

Forward voltage:

Switching rating: 250 V @ 3 A

MECHANICAL CHARACTERISTICS

Terminal: PCB terminal

Contact material: Gold

Switching system: Snap-action switching element

Switching positions: 3 positions

Weight: 0.003 kg

CERTIFICATE

REACH: REACH compliant

RoHS: RoHS compliant

OTHER


Short Description: Switching element, Snap-action switching element, 250 V @ 3 A, Gold, 2 NC / 2 NO, PCB terminal

Housing material: Plastic, according to UL 94 V0


Product attributes: Including locking pin

Hints: Including locking pin

Wiring diagrams:

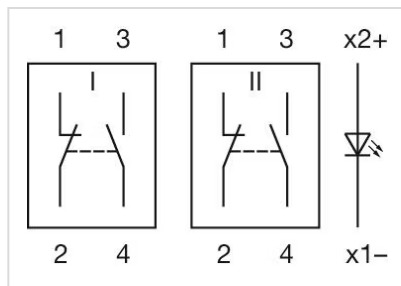

Component layouts:

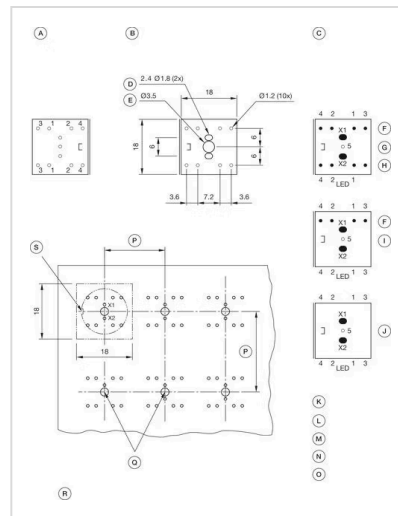

A = Terminals (rear side)

B = Drilling plan (component side)

C = non-metallic

D = Cu-Pad

E = Occupancy plan (component side)

F = 1. Switch

G = Switching element 2 Normally close + 2 Normally open, Part No. 71-672.026

H = 2. Switches

I = Switching element 1 Normally close + 1 Normally open, Part No. 71-671.026

J = Illumination element, Part No. 71-670.026

K = X1 Lamp cathode (-)

L = X2 Lamp anode (+)

M = 1-2 Contact normally closed

N = 3-4 Contact normally open

O = 5 Hole for interlocking pin

P = Front dimension min.

Q = Position interlocking pin

R = Note:

Pitch of the print circuit board hole Ø3.5 must agree with the mounting holes on the front plate

S = Slot in actuator