



Main Product Characteristics

BV_{DSS}	-30V
$R_{DS(ON)}$	19m Ω (Max.)
I_D	-30A



PPAK3x3



Schematic Diagram

Features and Benefits

- Advanced MOSFET process technology
- Ideal for high efficiency switched mode power supplies
- Low on-resistance with low gate charge
- Fast switching and reverse body recovery



Description

The GSFN3019 utilizes the latest techniques to achieve high cell density and low on-resistance. These features make this device extremely efficient and reliable for use in high efficiency switch mode power supplies and a wide variety of other applications.

Absolute Maximum Ratings ($T_A=25^\circ\text{C}$ unless otherwise specified)

Parameter	Symbol	Max.	Unit
Drain-Source Voltage	V_{DS}	-30	V
Gate-Source Voltage	V_{GS}	± 25	V
Drain Current-Continuous ($T_C=25^\circ\text{C}$)	I_D	-30	A
Drain Current-Continuous ($T_C=100^\circ\text{C}$)		-19	
Drain Current-Pulsed ¹	I_{DM}	-120	A
Single Pulse Avalanche Energy ²	E_{AS}	54	mJ
Single Pulse Avalanche Current ²	I_{AS}	-33	A
Power Dissipation ($T_C=25^\circ\text{C}$)	P_D	27	W
Power Dissipation-Derate above 25 $^\circ\text{C}$		0.22	
Thermal Resistance, Junction-to-Ambient	$R_{\theta JA}$	62	$^\circ\text{C}/\text{W}$
Thermal Resistance, Junction-to-Case	$R_{\theta JC}$	4.6	$^\circ\text{C}/\text{W}$
Operating Junction Temperature Range	T_J	-55 To +150	$^\circ\text{C}$
Storage Temperature Range	T_{STG}	-55 To +150	$^\circ\text{C}$

Electrical Characteristics ($T_J=25^\circ\text{C}$ unless otherwise specified)

Parameter	Symbol	Conditions	Min.	Typ.	Max.	Unit
On / Off Characteristics						
Drain-Source Breakdown Voltage	BV_{DSS}	$V_{GS}=0V, I_D=-250\mu A$	-30	-	-	V
BV_{DSS} Temperature Coefficient	$\Delta BV_{DSS}/\Delta T_J$	Reference to 25°C , $I_D=-1\text{mA}$	-	-0.03	-	$V/^\circ\text{C}$
Drain-Source Leakage Current	I_{DSS}	$V_{DS}=-27V, V_{GS}=0V, T_J=25^\circ\text{C}$	-	-	-1	μA
		$V_{DS}=-24V, V_{GS}=0V, T_J=125^\circ\text{C}$	-	-	-10	μA
Gate-Source Leakage Current	I_{GSS}	$V_{GS}=\pm 20V, V_{DS}=0V$	-	-	± 100	nA
Static Drain-Source On-Resistance	$R_{DS(ON)}$	$V_{GS}=-10V, I_D=-8A$	-	16	19	m Ω
		$V_{GS}=-4.5V, I_D=-6A$	-	25	30	
Gate Threshold Voltage	$V_{GS(th)}$	$V_{GS}=V_{DS}, I_D=-250\mu A$	-1.1	-1.6	-2.9	V
$V_{GS(th)}$ Temperature Coefficient	$\Delta V_{GS(th)}$		-	4	-	mV/ $^\circ\text{C}$
Forward Transconductance	g_{fs}	$V_{DS}=-10V, I_D=-8A$	-	6.8	-	S
Dynamic and Switching Characteristics						
Total Gate Charge ^{2,3}	Q_g	$V_{DS}=-15V, I_D=-5A, V_{GS}=-4.5V$	-	11	17	nC
Gate-Source Charge ^{2,3}	Q_{gs}		-	3.4	6	
Gate-Drain Charge ^{2,3}	Q_{gd}		-	4.2	8	
Turn-On Delay Time ^{2,3}	$t_{d(on)}$	$V_{DD}=-15V, R_G=6\Omega, V_{GS}=-10V, I_D=-1A$	-	5.8	11	nS
Rise Time ^{2,3}	t_r		-	18.8	36	
Turn-Off Delay Time ^{2,3}	$t_{d(off)}$		-	46.9	90	
Fall Time ^{2,3}	t_f		-	12.3	23	
Input Capacitance	C_{iss}	$V_{DS}=-15V, V_{GS}=0V, F=1\text{MHz}$	-	1250	2500	pF
Output Capacitance	C_{oss}		-	160	320	
Reverse Transfer Capacitance	C_{rss}		-	90	180	
Source-Drain Ratings and Characteristics						
Continuous Source Current	I_S	$V_{GS}=V_{DS}=0V,$ Force Current	-	-	-30	A
Pulsed Source Current	I_{SM}		-	-	-60	A
Diode Forward Voltage	V_{SD}	$V_{GS}=0V, I_S=-1A, T_J=25^\circ\text{C}$	-	-	-1	V

Notes:

1. Repetitive rating: Pulsed width limited by maximum junction temperature.
2. $V_{DD}=-25V, V_{GS}=-10V, L=0.1\text{mH}, I_{AS}=-33A$, starting $T_J=25^\circ\text{C}$.
3. Pulse test: pulse width $\leq 300\mu\text{s}$, duty cycle $\leq 2\%$.

Typical Electrical and Thermal Characteristic Curves

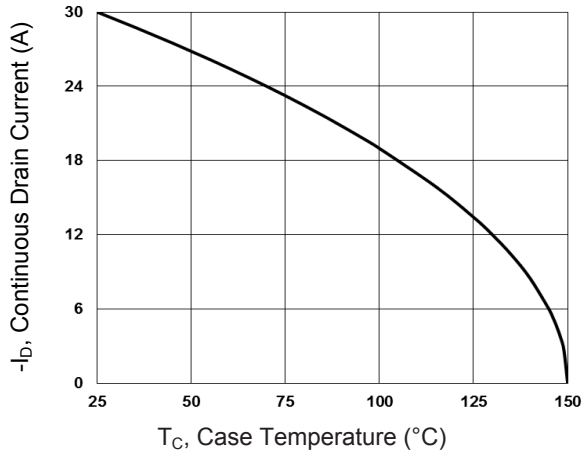


Figure 1. Continuous Drain Current Vs. T_c

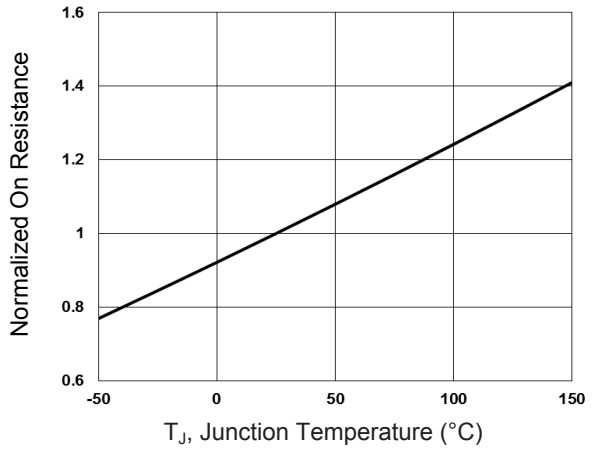


Figure 2. Normalized $R_{DS(ON)}$ Vs. T_j

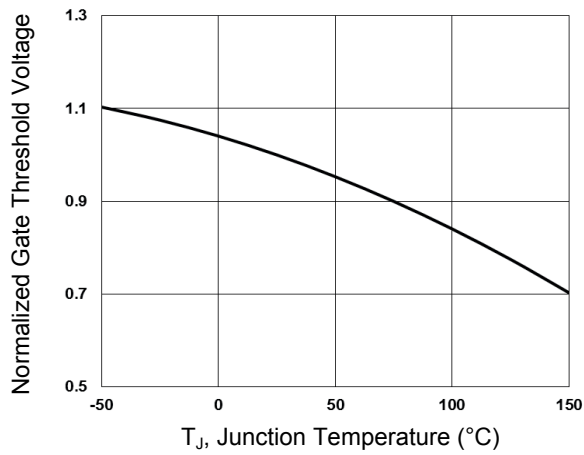


Figure 3. Normalized V_{th} Vs. T_j

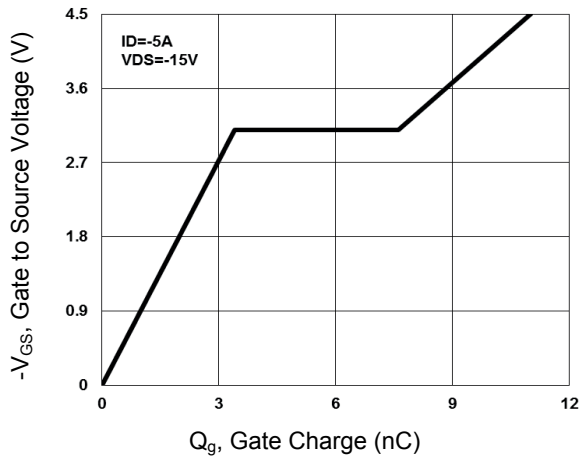


Figure 4. Gate Charge Waveform

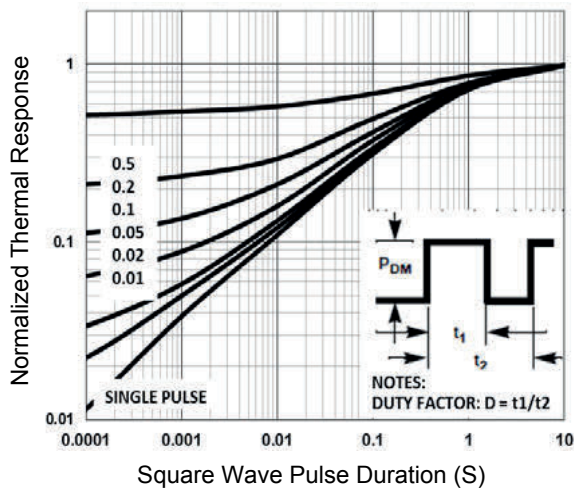


Figure 5. Normalized Transient Impedance



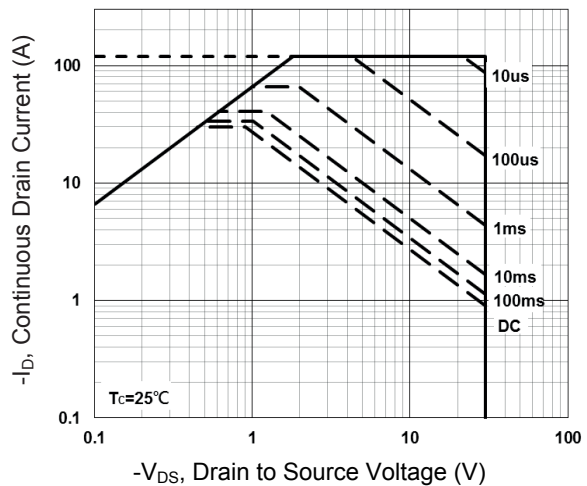


Figure 6. Maximum Safe Operation Area



Package Outline Dimensions (PPAK3x3)

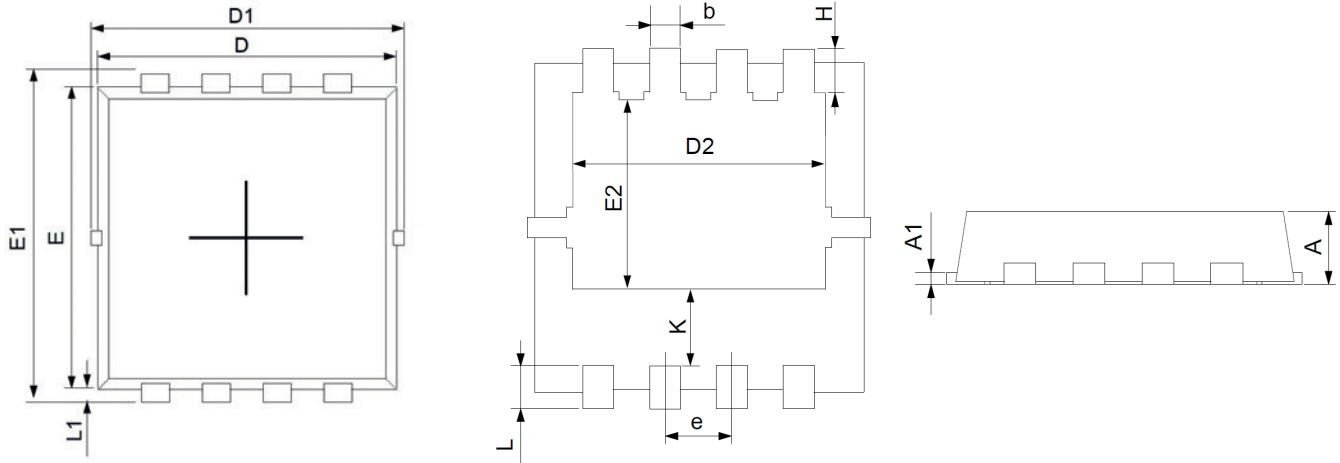

Symbol	Dimensions In Millimeters		Dimensions In Inches	
	Min.	Max.	Min.	Max.
A	0.70	0.90	0.028	0.035
A1	0.14	0.20	0.006	0.008
D	3.05	3.25	0.120	0.128
E	2.90	3.10	0.114	0.122
D1	3.10	3.50	0.122	0.138
D2	2.35	2.50	0.093	0.098
E1	3.10	3.50	0.122	0.138
E2	1.64	1.84	0.065	0.072
b	0.25	0.35	0.010	0.014
K	0.59	0.79	0.023	0.031
e	0.55	0.75	0.022	0.030
L	0.25	0.55	0.010	0.022
L1	0.10	0.20	0.004	0.008
H	0.32	0.52	0.013	0.020

Order Information

Device	Package	Marking	Carrier	Quantity
GSFN3019	PPAK3x3	N3019	Tape & Reel	5,000pcs / Reel

For more information, please contact us at: inquiry@goodarksemi.com