



Main Product Characteristics

$V_{(BR)DSS}$	100V
$R_{DS(ON)}$	4.6mΩ
I_D	120A



TO-220

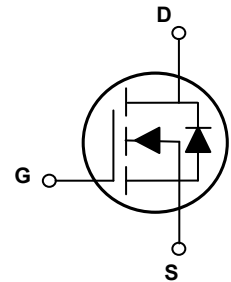

Schematic Diagram

Features and Benefits

- Advanced MOSFET process technology
- Ideal for high efficiency switched mode power supplies
- Low on-resistance with low gate charge
- Fast switching and reverse body recovery



Description

The GSFH5R010 utilizes the latest techniques to achieve high cell density and low on-resistance. These features make this device extremely efficient and reliable for use in high efficiency switch mode power supplies and a wide variety of other applications.

Absolute Maximum Ratings ($T_A=25^{\circ}\text{C}$ unless otherwise specified)

Parameter	Symbol	Max.	Unit
Drain-Source Voltage	V_{DS}	100	V
Gate-to-Source Voltage	V_{GS}	±20	V
Continuous Drain Current, @ Steady-State ($T_C=25^{\circ}\text{C}$)	I_D	120	A
Continuous Drain Current, @ Steady-State ($T_C=100^{\circ}\text{C}$)		100	A
Pulsed Drain Current	I_{DM}	480	A
Power Dissipation ($T_C=25^{\circ}\text{C}$)	P_D	200	W
		1.6	W/°C
Single Pulse Avalanche Energy ¹	E_{AS}	274	mJ
Thermal Resistance, Junction-to-Case	$R_{\theta JC}$	0.63	°C/W
Thermal Resistance, Junction-to-Ambient (PCB Mounted, Steady-State)	$R_{\theta JA}$	62.5	°C/W
Operating Junction and Storage Temperature Range	T_J/T_{STG}	-55 to +150	°C

Electrical Characteristics ($T_J=25^{\circ}\text{C}$ unless otherwise specified)

Parameter	Symbol	Conditions	Min.	Typ.	Max.	Unit
On / Off Characteristics						
Drain-to-Source Breakdown Voltage	$V_{(BR)DSS}$	$V_{GS}=0V, I_D=250\mu A$	100	-	-	V
Drain-to-Source Leakage Current	I_{DSS}	$V_{DS}=100V, V_{GS}=0V$	-	-	1.0	μA
Gate-to-Source Forward Leakage	I_{GSS}	$V_{GS}=20V$	-	-	100	nA
		$V_{GS}=-20V$	-	-	-100	
Static Drain-to-Source On-Resistance	$R_{DS(ON)}$	$V_{GS}=10V, I_D=50A$	-	4.6	5.5	m Ω
Gate Threshold Voltage	$V_{GS(th)}$	$V_{DS}=V_{GS}, I_D=250\mu A$	2.0	-	4.0	V
Dynamic and Switching Characteristics						
Input Capacitance	C_{iss}	$V_{GS}=0V, V_{DS}=50V$ $F=1MHz$	-	5208	-	pF
Output Capacitance	C_{oss}		-	565	-	
Reverse Transfer Capacitance	C_{rss}		-	22	-	
Total Gate Charge ^{2,3}	Q_g	$I_D=25A, V_{DD}=50V,$ $V_{GS}=10V$	-	80	-	nC
Gate-to-Source Charge ^{2,3}	Q_{gs}		-	29	-	
Gate-to-Drain ("Miller") Charge ^{2,3}	Q_{gd}		-	17	-	
Turn-on Delay Time ^{2,3}	$t_{d(on)}$	$V_{GS}=10V, V_{DD}=50V,$ $R_G=1.6\Omega, I_D=25A$	-	20	-	nS
Rise Time ^{2,3}	t_r		-	40	-	
Turn-Off Delay Time ^{2,3}	$t_{d(off)}$		-	71	-	
Fall Time ^{2,3}	t_f		-	17	-	
Gate Resistance	R_g	$F=1MHz$	-	3.6	-	Ω
Source-Drain Ratings and Characteristics						
Continuous Source Current (Body Diode)	I_S	MOSFET symbol showing the integral reverse p-n junction diode.	-	-	120	A
Pulsed Source Current (Body Diode)	I_{SM}		-	-	480	A
Diode Forward Voltage	V_{SD}	$I_S=50A, V_{GS}=0V$	-	-	1.4	V
Reverse Recovery Time ²	T_{rr}	$V_{GS}=0V, I_S=25A,$ $dI_F/dt=100A/\mu s$	-	61	-	nS
Reverse Recovery Charge ²	Q_{rr}		-	0.12	-	μC

Note:

1. $L=0.1mH, R_G=25\Omega, I_{AS}=74A, V_{DD}=80V, T_J=25^{\circ}C$.
2. Pulse test: Pulse width $\leq 300\mu s$, duty cycle $\leq 2\%$.
3. Basically unaffected by operating temperature.

Typical Electrical and Thermal Characteristic Curves

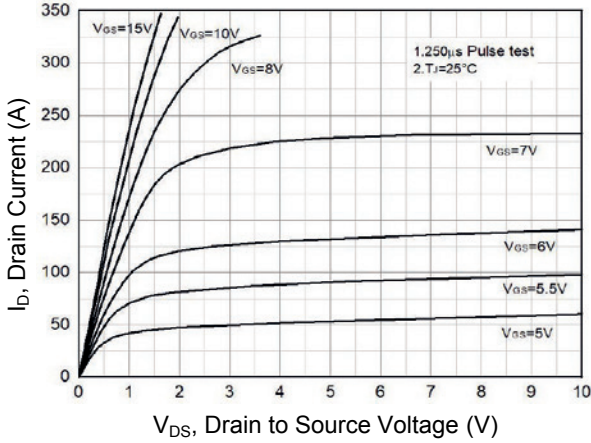


Figure 1. Typical Output Characteristics

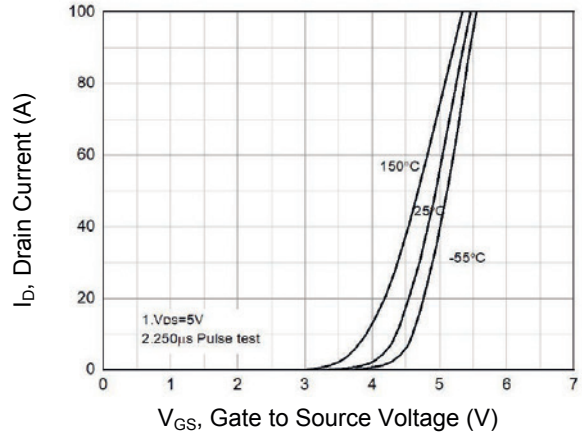


Figure 2. Typical Transfer Characteristics

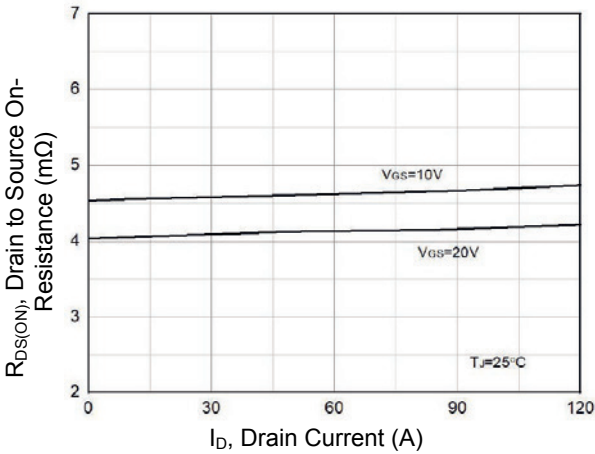


Figure 3. On-Resistance vs. Drain Current

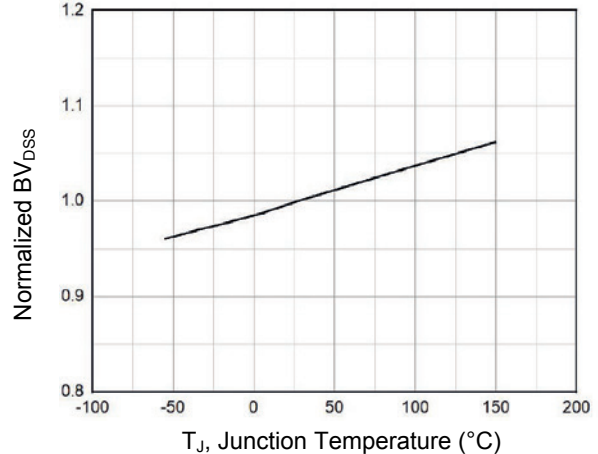


Figure 4. Normalized BV_{DSS} vs. Junction Temperature

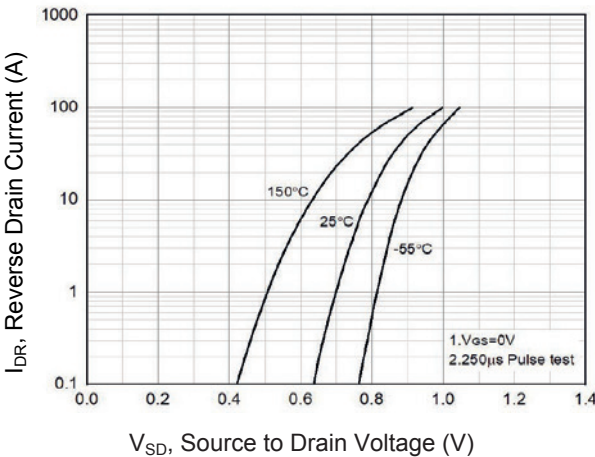


Figure 5. Body Diode Characteristics

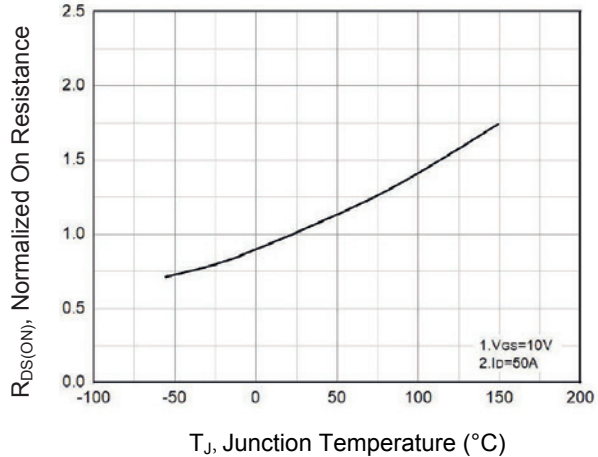


Figure 6. Normalized On-Resistance Vs. Junction Temperature

Typical Electrical and Thermal Characteristic Curves

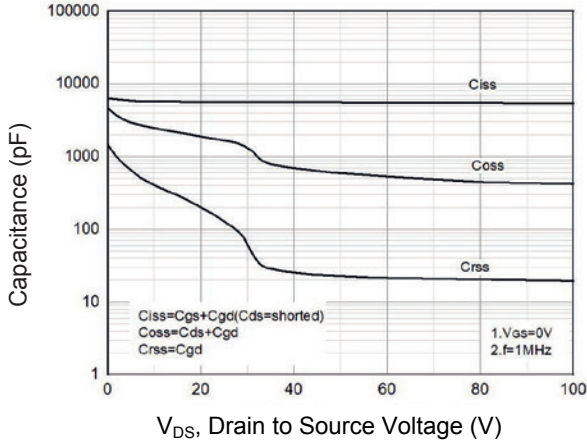


Figure 7. Capacitance Characteristics

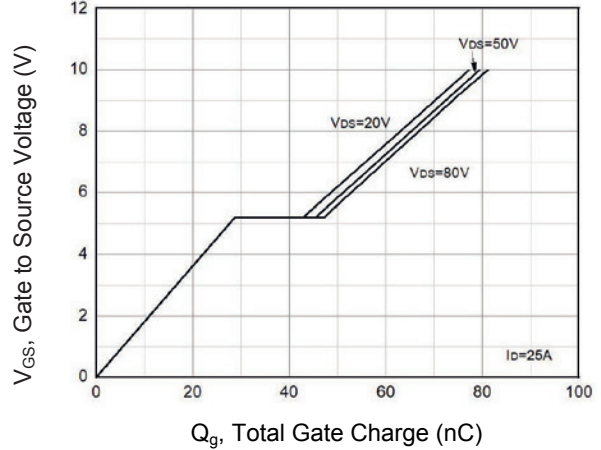


Figure 8. Gate Charge

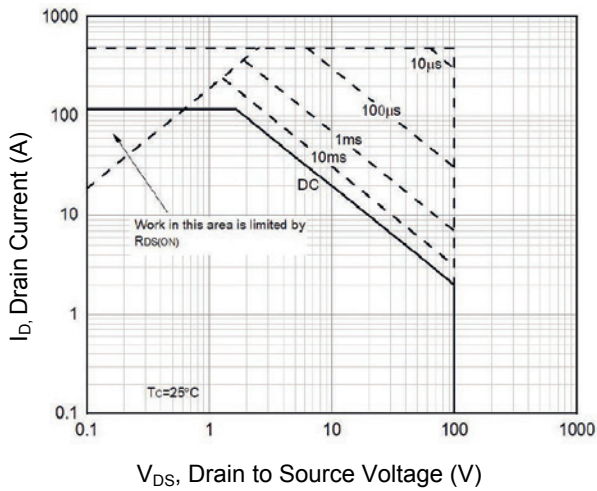


Figure 9. Safe Operation Area


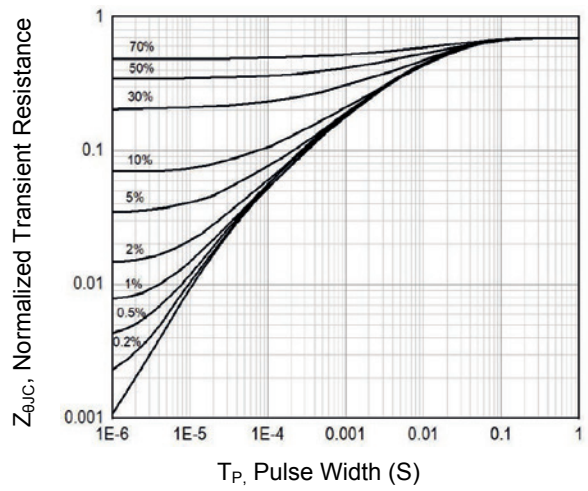


Figure 10. Transient Thermal Impedance vs. T_P

Package Outline Dimensions (TO-220)

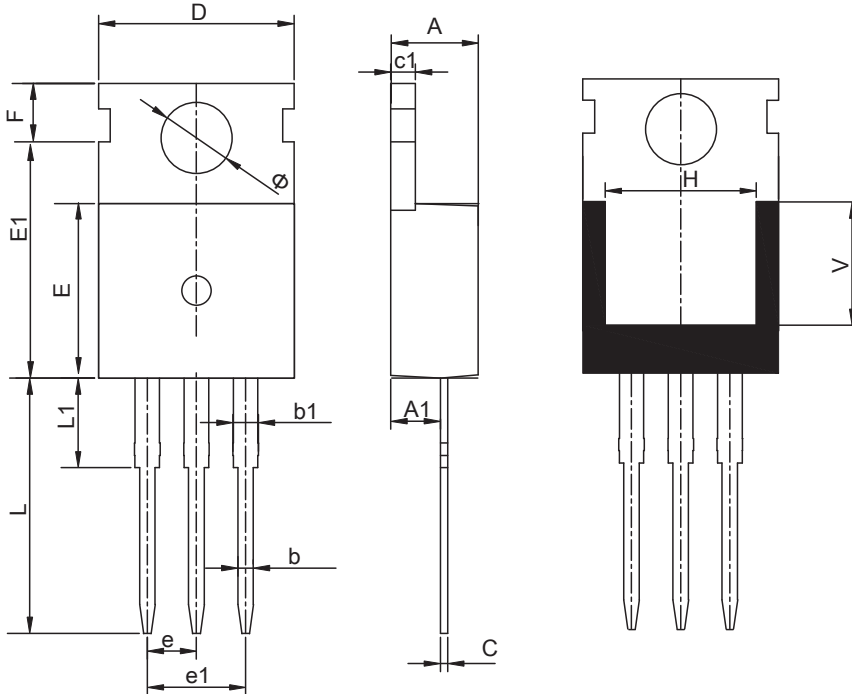

Symbol	Dimensions In Millimeters		Dimensions In Inches	
	Min.	Max.	Min.	Max.
A	4.40	4.60	0.173	0.181
A1	2.25	2.70	0.089	0.106
b	0.71	0.91	0.028	0.036
b1	1.17	1.37	0.046	0.054
C	0.33	0.65	0.013	0.026
c1	1.20	1.40	0.047	0.055
D	9.91	10.25	0.390	0.404
E	8.95	9.75	0.352	0.384
E1	12.65	13.00	0.498	0.512
e	2.54 TYP		0.100 TYP	
e1	4.98	5.18	0.196	0.204
F	2.65	2.95	0.104	0.116
H	7.90	8.10	0.311	0.319
L	12.90	13.40	0.508	0.528
L1	2.68	3.25	0.106	0.128
V	6.90 REF		0.272 REF	
Φ	3.40	3.80	0.134	0.150

Order Information

Device	Package	Marking	Carrier	Quantity
GSFH5R010	TO-220	H5R010	Tube	50pcs / Tube

For more information, please contact us at: inquiry@goodarksemi.com